



Technical information



Schüco CT 70 Classic

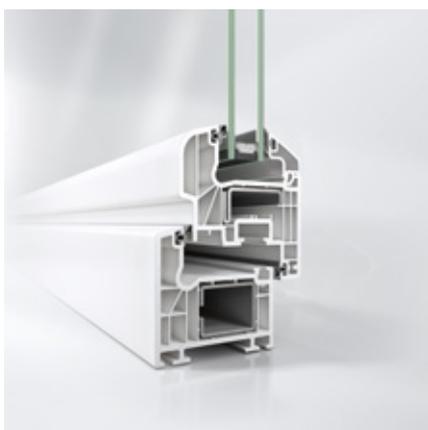

Schüco CT 70 Rondo

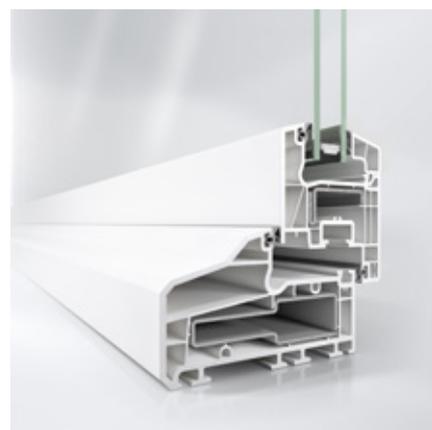

Schüco CT 70 Accent

Schüco CT 70	Classic / Rondo / Accent
Dimensions	
Basic depth of outer frame	70 mm / 70 mm / 112 mm
Basic depth of vent frame	70 mm / 78 mm / 70 mm
Possible glazing thickness	4 mm – 42 mm
Tests and standards	
Thermal insulation in accordance with DIN EN 12412-2	$U_f = 1,3 \text{ W}/(\text{m}^2\text{K})$
Sound reduction in accordance with DIN EN ISO 140-3 (maximum)	$R_{w,P} = 47 \text{ dB}^*$
Burglar resistance in accordance with DIN EN 1627	RC 2
Air permeability in accordance with DIN EN 12207 (class)	4
Watertightness in accordance with DIN EN 12208 (class)	9A
Resistance to wind load in accordance with DIN EN 12210 (class)*	B5
Mechanical loading in accordance with DIN EN 13115 (class)	4
Resistance to repeated opening and closing in accordance with DIN EN 12400 (class)	2
Operating forces in accordance with DIN EN 13115 (class)	1
Load-bearing capacity of safety devices TBDK	Requirement fulfilled

* Dependent on profile and glazing